

NOW WITH
HDMI
INPUT



ZM-L Series now includes HDMI input to maximize resolution with DIGIMASTER H.264 DVRs.

Monitors

17" and 19" Hi-Res Color LCD Monitors

ZM-L Series

3
Year
Warranty
Commercial Grade
24x7

The ZM-L Series color LCD displays feature an active matrix LCD screen with 3-D combfilter for outstanding resolution, contrast and brightness. These units provide HDMI, VGA and composite video inputs for use with a DVR, NVR, PC or analog CCTV camera. A slim, light-weight design and optional wall, ceiling and rack mount accessories make these monitors the ideal choice for a wide variety of security and public display applications.

Features:

- Commercial grade components designed for 24x7 operation
- 1280 x 1024 resolution suitable for analog or IP cameras up to 1.3 MP resolution
- HDMI, BNC and VGA video inputs, stereo audio inputs
- Optional VESA wall, pole and rack mounts
- Multi-camera PIP and PBP display with external trigger input
- Anti-glare hard-coated protective screen
- UL, CE and FCC compliant


ZM-L Series

17" and 19" Hi-Res Color LCD Monitors

■ Mounting Options



■ PIP Feature

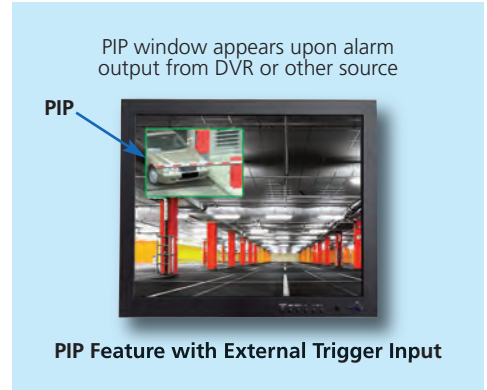

■ Specifications

Model	ZM-L17A	ZM-L19A	
Video	Screen Size	17"	19"
	Resolution	1280 x 1024 @60Hz	
	Brightness	250cd/m ²	
	Contrast Ratio	1000:1	800:1
	Aspect Ratio	5 : 4	
	Viewing Angle (H/V)	160° / 160°	
	Pixel Pitch	0.264 x 0.264 mm	
	Display Color	16.7 Million	
	Response Time	< 5ms	
	Video System	NTSC / PAL	
	Scanning Frequency	(H) 31 ~ 64 KHz / (V) 56 ~ 75 Hz	
Interfaces	Video	HDMI In, Video In/ Out (BNC Type) 2 / 2, RGB In (15 Pin D-Sub)	
	Audio	Audio In/Out (RCA Type), PC Stereo In	
	Trigger	External Trigger Input included (with Trigger Cable)	
Audio	Built-in Speakers	Yes (2W X 2)	
Special Features	Trigger Sensor	Yes	
	Remote Control	Handheld Remote Transmitter included	
	Multi-Display Function	Picture-in-Picture or Picture by Picture Display	
	Filter Type	3D Combfilter / Deinterlace	
Additional	OSD Language	English, French, German, Italian, Spanish, Danish, Portuguese, Dutch	
	Dimensions (W x H x D)	15.4" x 13.2" x 2.6" / 390mm x 334mm x 67mm	16.9" x 14.4" x 2.8" / 429mm x 365mm x 72mm
	Net Weight	12.6 lbs	14.3 lbs.
	Finish/Tilt Stand	Black/Included	
	VESA Mount	100 x 100 mm (BS M4 x 10 mm Screw)	
	MTBF (Approx.)	50,000 Hours	
	Power Consumption	< 45W	
	Power	100-240VAC / 12VDC	
	Operating Temperature	32° - 104°F / 0 - 40°C	
	Certifications	UL, CB, FCC (A), CE-Emc (LVD)	
Optional	RMK-08	Universal tilting rack mount fits 17", 19", 8" and 20" models (includes tilt adjust head)	
	CMK-08	Telescoping Pole Mount, adjusts from 25" to 48"	
	ZM-QM1	Vesa Wall Mount	

All specifications are subject to change without notice

Models available from 4" to 22" HD - see online catalog for details

